


# クランピングスクリュー(Bタイプ)

CLAMPING SCREW B TYPE

CBR




- 材質 本体=SCM21 鋼球=SUJ2
- 硬度 本体=HRC32~38° 鋼球=HRC62°

(寸法表)


単位 長さ(mm) 質量約(g)

No.	A	B	D	E	F	質量
CBR-615	14.5	10	6	M 6	5	5.3
CBR-625	23.5	10	6	M 6	5	7.4
CBR-635	33.5	10	6	M 6	5	9.5
CBR-820	18.7	13	8	M 8	6	13.5
CBR-830	28.7	13	8	M 8	6	20.0
CBR-840	38.7	13	8	M 8	6	24.0
CBR-1025	25.0	16	10	M 10	8	26.0
CBR-1040	40.0	16	10	M 10	8	34.0
CBR-1060	60.0	16	10	M 10	8	46.0
CBR-1230	31.2	18	12	M 12	10	40.0
CBR-1245	46.2	18	12	M 12	10	50.0
CBR-1265	66.2	18	12	M 12	10	70.0
CBR-1280	81.2	18	12	M 12	10	83.0
CBR-1640	40.6	24	16	M 16	14	90.0
CBR-1650	50.6	24	16	M 16	14	110.0
CBR-1665	65.6	24	16	M 16	14	130.0
CBR-1690	90.6	24	16	M 16	14	170.0

CBF



CBW



- 材質 本体=SCM21 鋼球=SUJ2
- 硬度 本体=HRC32~38° 鋼球=HRC62°

□記号 F=CBF  
W=CBW


(寸法表)

単位 長さ(mm) 質量約(g)

No.	A	B	D	E	F	質量
CB□-615	14	10	6	M 6	5	5.3
CB□-625	23	10	6	M 6	5	7.4
CB□-635	33	10	6	M 6	5	9.5
CB□-820	18	13	8	M 8	6	13.5
CB□-830	28	13	8	M 8	6	20.0
CB□-840	38	13	8	M 8	6	24.0
CB□-1025	24	16	10	M 10	8	26.0
CB□-1040	39	16	10	M 10	8	34.0
CB□-1060	59	16	10	M 10	8	46.0
CB□-1230	30	18	12	M 12	10	40.0
CB□-1245	45	18	12	M 12	10	50.0
CB□-1265	65	18	12	M 12	10	70.0
CB□-1280	80	18	12	M 12	10	83.0
CB□-1640	39	24	16	M 16	14	90.0
CB□-1650	49	24	16	M 16	14	110.0
CB□-1665	64	24	16	M 16	14	130.0
CB□-1690	89	24	16	M 16	14	170.0

# ロケートスクリーピン

LOCATE SCREW PIN

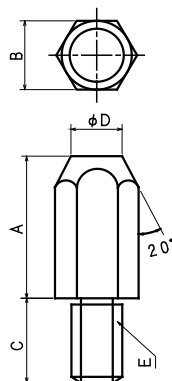

- 材質 S45C
- 硬度 HRC35°

(寸法表)

単位 長さ(mm) 質量約(g)

No.	A	B	C	D	E	質量
LSP-3012	30	19	24	15	M 12	98
LSP-4012	40	19	24	15	1.75	122
LSP-3016	30	24	28	20	M 16	160
LSP-4016	40	24	28	20	2.0	200